


Gaso, 1844, Duplex, Piston Pump (Mud Pump)

Pumps in this series

- [1844](#)
- [1845](#)
- [1848](#)
- [1849](#)


Specs

Spec	U.S. Standard
Type:	duplex
Minimum Piston Diameter:	2½"
Maximum Piston Diameter:	4½"
Stroke length:	6"
Maximum Working Pressure:	990 PSI
Rod/Piston Load:	4850lb
Gallons per Minute:	160.0
Barrels per Day:	5486
Brake Horse Power:	31.0

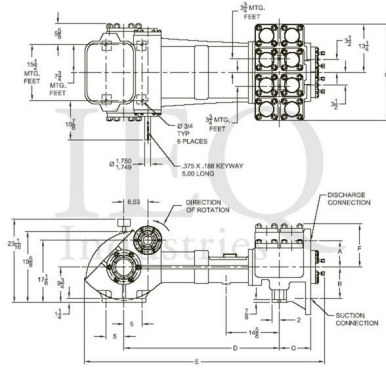

Pump Curves

Hover over Power Curves to reveal RPM and GPM

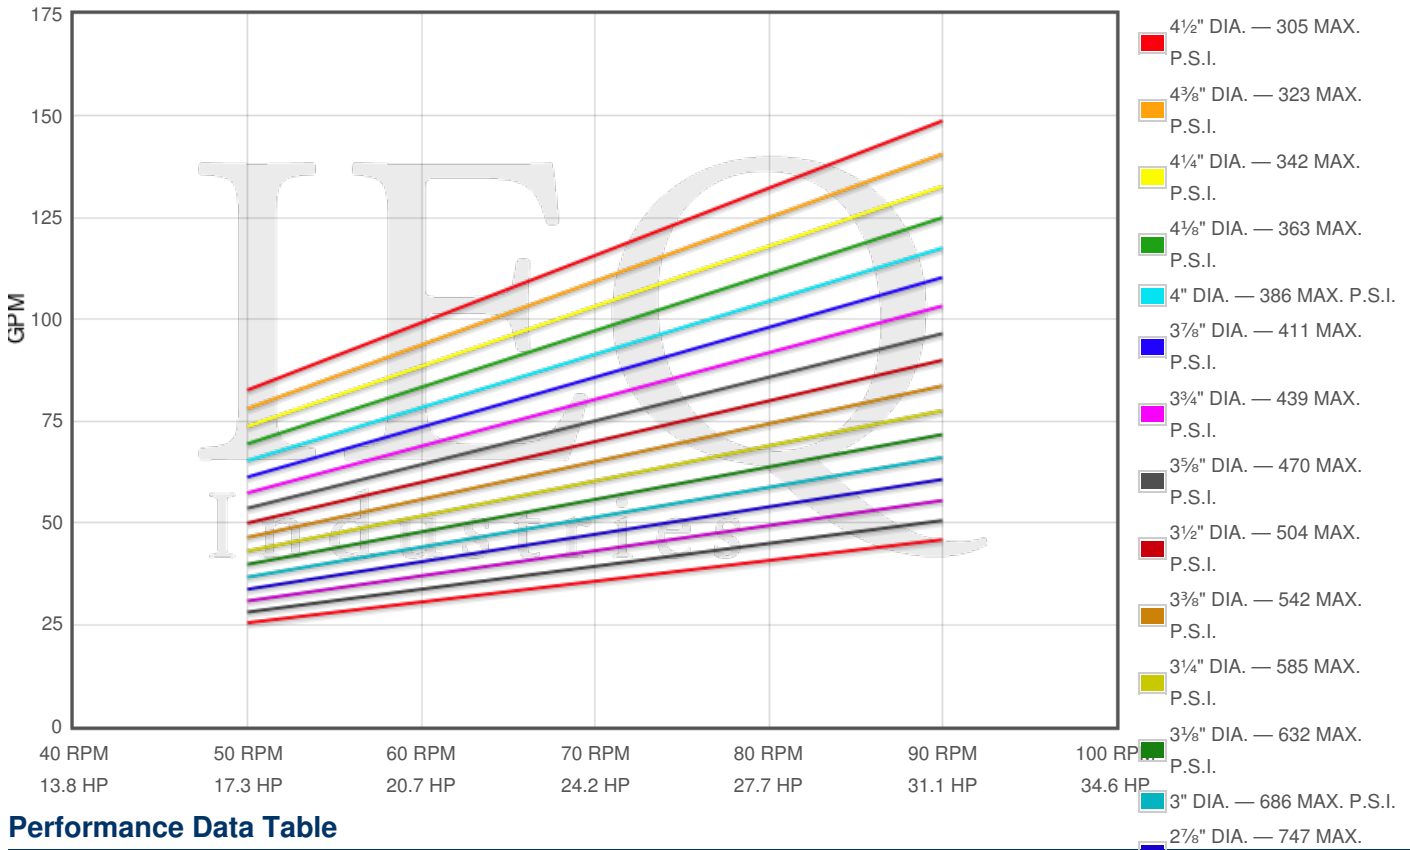

Performance Data Table

Pump	English Units					50 RPM		60 RPM		70 RPM		80 RPM		90 RPM	
	Plunger Dia. In.	Plunger Area Sq. In.	BPD per RPM	GPM per RPM	Max Press. PSI	BPD	GPM	BPD	GPM	BPD	GPM	BPD	GPM	BPD	GPM
1844	4.500	15.9043	56.654	1.6524	305	2833	83	3399	99	3966	116	4532	132	5099	149
	4.250	14.1863	50.534	1.4739	342	2527	74	3032	88	3537	103	4040	118	4548	133
	4.000	12.5664	44.763	1.3056	386	2238	65	2686	78	3133	91	3581	104	4029	118
	3.750	11.0447	39.343	1.1475	439	1967	57	2361	69	2754	80	3147	92	3541	103
	3.500	9.6211	34.272	0.9996	504	1714	50	2056	60	2399	70	2742	80	3085	90
	3.250	8.2958	29.551	0.8619	585	1478	43	1773	52	2069	60	2364	69	2660	78
	3.000	7.0686	25.179	0.7344	686	1259	37	1511	44	1763	51	2014	59	2266	66
	2.750	5.9396	21.158	0.6171	817	1058	31	1270	37	1481	43	1693	49	1904	56
	2.500	4.9087	17.486	0.5100	988	874	25	1049	31	1224	36	1399	41	1574	46

Features/Benefits

GASO DUPLEX PISTON PUMPS

Ratings published here are intended to be used only for preliminary planning purposes, and as such carry no warranties whatsoever. All applications for gas pumps must be approved in writing. THE INFORMATION CONTAINED HERE IS TRANSCRIBED FROM A GASO TECHNICAL MANUAL FROM THE 1960s - 70s. IEQ INDUSTRIES OR THE CUSTODIANS OF THIS WEBSITE ARE NOT RESPONSIBLE FOR ITS CONTENT.

Power End Specifications

Power Frame. High-strength gray iron alloy casting with heavy wall sections, well ribbed to ensure rigid construction and design to fully enclose all working parts.

Gears. Continuous to Sykes herringbone construction. Main gear is heat treated high-grade ductile iron. Pinion gear is cut from forged alloy steel and hardened.

Crankshaft. Have a center section for mounting main gear. Large diameter crank pins

Pinion Shaft. Alloy steel bar stock, machine and precision ground.

Bearings. Heavy duty tapered roller bearings on crankshaft. Self-contained double roll bearings on pinion shaft to permit free floating of shaft for self centering of gears.

Connecting Rods. Heavy cross section castings with renewable Babbitt lined steel shell bearings and crank end; bronze bushing in cross head end.

Lubrication. All power end parts including gears, cross heads, connecting rod bearings, crankshaft bearings and pinion crank shaft bearings, are lubricated by splash system from lubricant in crankcase reservoir.

Fluid End Specifications

Power Frame. Alloys stocked are Molybdenum cast iron and cast steel. Fluid end can be trimmed out for pumping various liquids. Ductile iron can be furnished upon request.

Cylinder Heads. Heavy section alloy casting to match material of pump fluid body.

Valve Covers. Heavy section alloy casting to match material of pump fluid body.

Liners. All pumps are available with interchangeable pipe liners. Standard materials available are Molybdenum alloyed iron, file hard steel and special corrosion resistant liners.

Piston Rods. Various rod materials are available. These are: steel, bronze, stainless steel, file hard steel, and chrome plated steel.

Pistons. Molybdenum iron and bronze bodies fitted with various types of rings or cups are available. Slush service pistons can also be furnished.

Valves. Valves and seats are available as follows: hardened and ground steel wing guided, bronze wing guided, steel or bronze insert type, direct blood valves for use on cast iron or bronze seats. McClatchie and mission can also be furnished.

Stuffing Boxes. All duplex pumps are furnished with replaceable type stuffing boxes which are available in cast iron and bronze.

Packing. Standard packing is a set of lip type packing rings. Other packings can be furnished for special applications.

Stuffing Box Lubrication. Furnished by use of regulated flow of oil from a force-feed lubricator or mounted on the pump, with a separate oil line to each stuffing box.

Disclaimer I

This website is intended as a reference tool only. It has been constructed from published data that is based on manufacturer's sales and engineering documents that are either current, historical and obsolete. Much of the machinery data contained herein has been re-rated through the years with different engineering criteria which may be in conflict with legacy data. Much of the content published here is calculated online with the use of dynamic data using formulas and extrapolations considered to be sound engineering formulas and are correct to the degree that the data used is accurate. We have done our best to be as precise as possible in this posting but do not represent any of the calculations or performance data to be entirely accurate. The data published here is intended to be general information rather than actual and to serve as a reference rather than a technical absolute. The user of such data should confirm such information independently.

Copyright and Disclaimers

WheatleyGas.com is your resource for Gaso pumps, Gaso pump parts and a supplier of ORIGINAL GASO PARTS and equipment, new used and remanufactured Wheatley, GASO and Wheatley/GASO plunger and piston pumps and pump parts and is not affiliated with Wheatley/GASO Inc. or its parent company, National Oilwell Varco, Copyright ©2024 IEQ Industries, a Gallagher Fluid Handling Company. All rights reserved, *Used under license from IntelleQ Holdings, LLC.