


Gaso, 2888-M, Triplex, Plunger Pump

Pumps in this series

- 2888-2
- 2888-3
- 2888-L
- 2888-M


Specs

Spec	U.S. Standard
Type:	triplex
Minimum Plunger Diameter:	2½"
Maximum Plunger Diameter:	3¼"
Stroke length:	3"
Maximum Working Pressure:	890 PSI
Rod/Piston Load:	4370lb
Gallons per Minute:	161.6
Barrels per Day:	5541
Brake Horse Power:	55.2

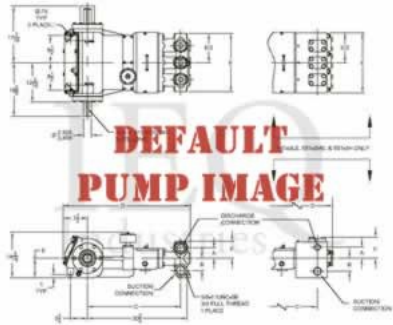

Pump Curves

Hover over Power Curves to reveal RPM and GPM

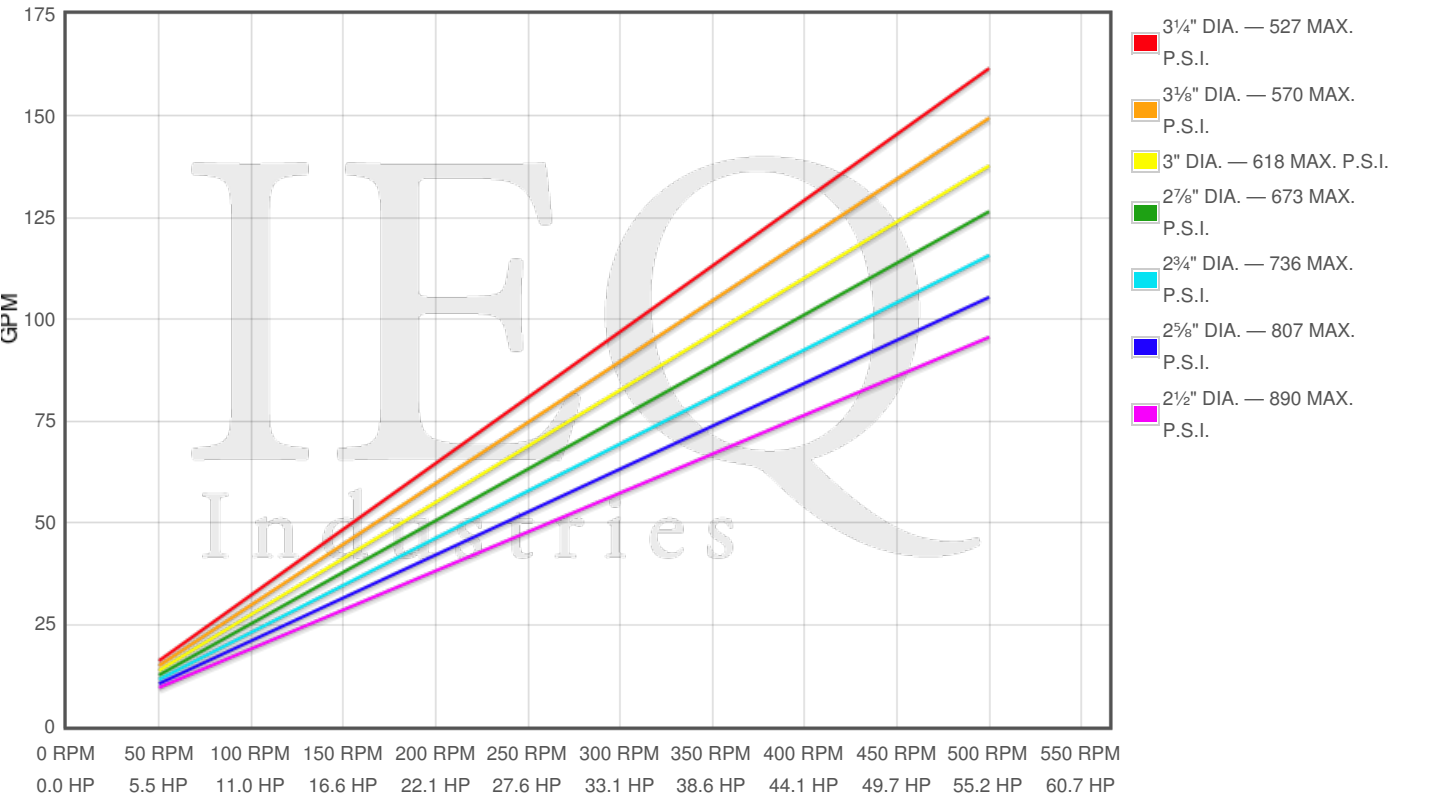

Performance Data Table

Pump	English Units					50 RPM		200 RPM		350 RPM		500 RPM	
	Plunger Dia. In.	Plunger Area Sq. In.	BPD per RPM	GPM per RPM	Max Press. PSI	BPD	GPM	BPD	GPM	BPD	GPM	BPD	GPM
2888-M	3.250	8.2958	11.082	0.3232	527	554	16	2216	65	3879	113	5541	162
	3.125	7.6699	10.246	0.2988	570	512	15	2049	60	3586	105	5123	149
	3.000	7.0686	9.442	0.2754	618	472	14	1889	55	3305	96	4721	138
	2.875	6.4918	8.672	0.2529	673	434	13	1734	51	3035	89	4336	126
	2.750	5.9396	7.934	0.2314	736	397	12	1587	46	2777	81	3967	116
	2.625	5.4119	7.229	0.2109	807	361	11	1446	42	2530	74	3615	105
	2.500	4.9087	6.557	0.1912	890	328	10	1311	38	2295	67	3279	96

Features/Benefits

