


Gaso, 2913-2, Triplex, Plunger Pump

Pumps in this series

- 2913-1
- 2913-2
- 2913-3
- 2913-4
- 2913-L
- 2913-M


Specs

Spec	U.S. Standard
Type:	triplex
Minimum Plunger Diameter:	1 1/4"
Maximum Plunger Diameter:	1 3/4"
Stroke length:	3"
Maximum Working Pressure:	2,900 PSI
Rod/Piston Load:	4370lb
Gallons per Minute:	49.9
Barrels per Day:	1711
Brake Horse Power:	55.2

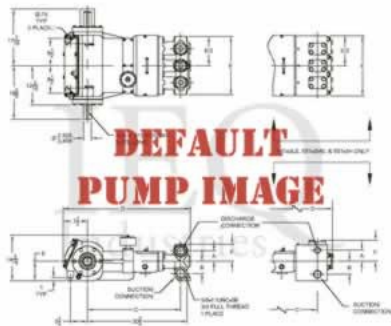

Pump Curves

Hover over Power Curves to reveal RPM and GPM

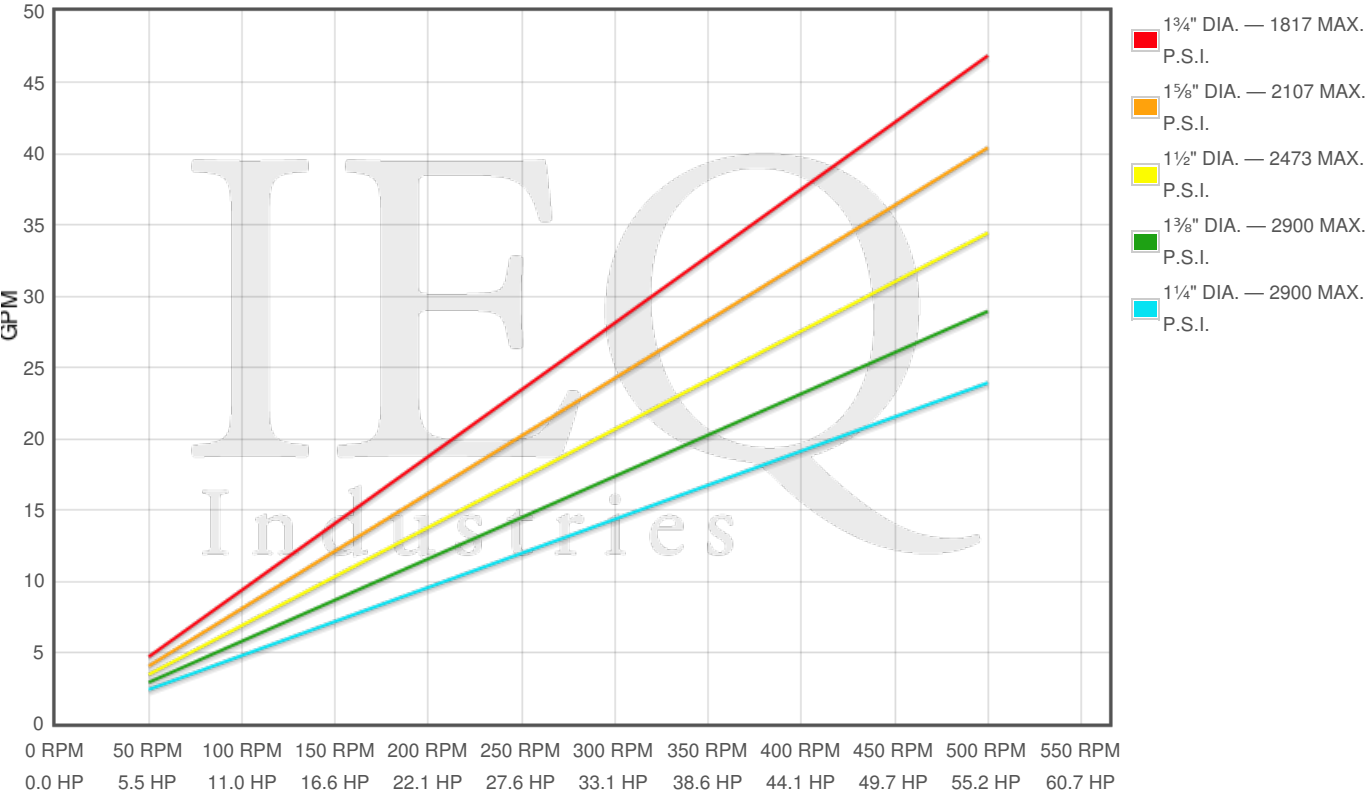

Performance Data Table

Pump	English Units					50 RPM		200 RPM		350 RPM		500 RPM	
	Plunger Dia. In.	Plunger Area Sq. In.	BPD per RPM	GPM per RPM	Max Press. PSI	BPD	GPM	BPD	GPM	BPD	GPM	BPD	GPM
2913-2	1.750	2.4053	3.213	0.0937	1817	161	5	643	19	1125	33	1607	47
	1.625	2.0739	2.770	0.0808	2107	139	4	554	16	970	28	1385	40
	1.500	1.7671	2.361	0.0688	2473	118	3	472	14	826	24	1180	34
	1.375	1.4849	1.984	0.0579	2900	99	3	397	12	694	20	992	29
	1.250	1.2272	1.639	0.0478	2900	82	2	328	10	574	17	820	24

Features/Benefits

