

GasO, 3364-4, Triplex, Plunger Pump

Pumps in this series


- [3364-1 \(55T-3H\)](#)
- [3364-2 \(55T-3MS\)](#)
- [3364-3 \(55T-3M\)](#)
- [3364-4](#)
- [3364-5](#)
- [3364-5SC \(55T-3SC\)](#)
- [3364-6 \(55T-3LS\)](#)
- [3364-7 \(55T-3L\)](#)
- [3364-F](#)

Specs

Spec	U.S. Standard	
Type:	triplex	3364-4, Triplex, Plunger Pump
Minimum Plunger Diameter:	1 3/4"	
Maximum Plunger Diameter:	2 1/4"	
Stroke length:	3"	
Maximum Working Pressure:	1,817 PSI	
Rod/Piston Load:	4370lb	
Gallons per Minute:	77.4	
Barrels per Day:	2654	
Brake Horse Power:	55.2	

Pump Curves

Hover over Power Curves to reveal RPM and GPM

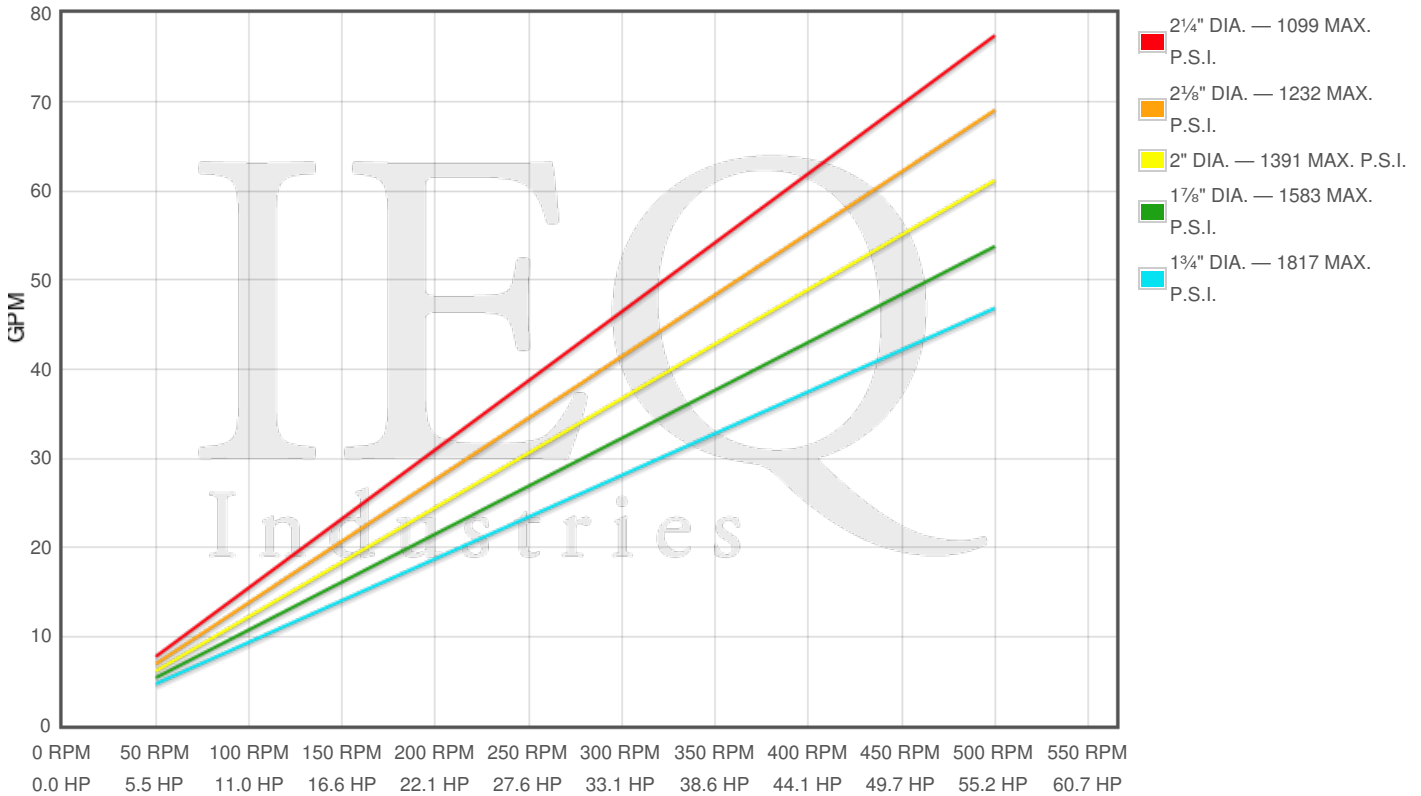

Performance Data Table

Pump	English Units					50 RPM		200 RPM		350 RPM		500 RPM	
	Plunger Dia. In.	Plunger Area Sq. In.	BPD per RPM	GPM per RPM	Max Press. PSI	BPD	GPM	BPD	GPM	BPD	GPM	BPD	GPM
3364-4	2.250	3.9761	5.311	0.1549	1099	266	8	1062	31	1859	54	2656	77
	2.125	3.5466	4.738	0.1382	1232	237	7	948	28	1658	48	2369	69
	2.000	3.1416	4.197	0.1224	1391	210	6	839	24	1469	43	2098	61
	1.875	2.7612	3.688	0.1076	1583	184	5	738	22	1291	38	1844	54
	1.750	2.4053	3.213	0.0937	1817	161	5	643	19	1125	33	1607	47

Features/Benefits

