

Wheatley, 5P-200A (31Q-2L), Quintuplex, Plunger Pump


Pumps in this series

5P-200A (31Q-2L)

- 31 horsepower 2 1/4" stroke horizontal quintuplex single acting plunger pump
- Available in four different fluid end materials
- Pump speeds up to 490 RPM


Specs

Spec	U.S. Standard
Type:	quintuplex
Minimum Plunger Diameter:	1 1/8"
Maximum Plunger Diameter:	1 3/4"
Stroke length:	2 1/4"
Maximum Working Pressure:	2,050 PSI
Rod/Piston Load:	2030lb
Gallons per Minute:	57.4
Barrels per Day:	1968
Brake Horse Power:	31.4

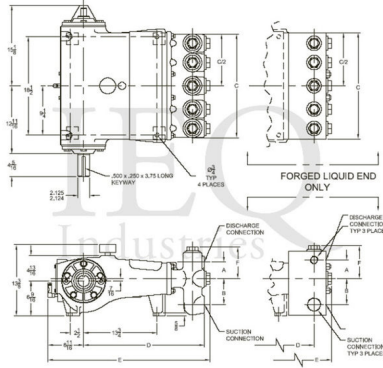

Pump Curves

Hover over Power Curves to reveal RPM and GPM

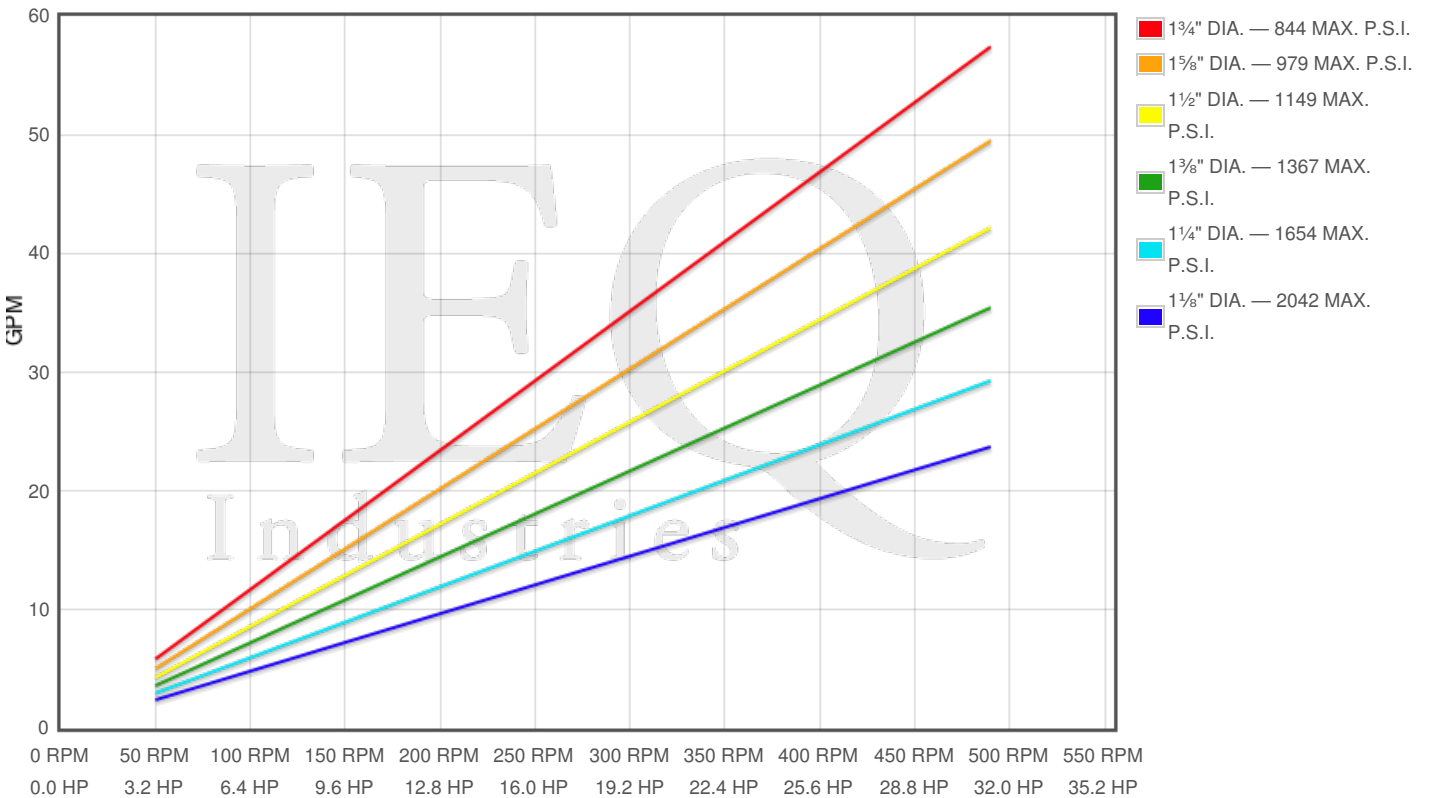

Performance Data Table

Pump	English Units					50 RPM		200 RPM		350 RPM		490 RPM	
	Plunger Dia. In.	Plunger Area Sq. In.	BPD per RPM	GPM per RPM	Max Press. PSI	BPD	GPM	BPD	GPM	BPD	GPM	BPD	GPM
5P-200A 31Q-2L	1.750	2.4053	4.016	0.1171	844	201	6	803	23	1406	41	1968	57
	1.625	2.0739	3.463	0.1010	979	173	5	693	20	1212	35	1697	49
	1.500	1.7671	2.951	0.0861	1149	148	4	590	17	1033	30	1446	42
	1.375	1.4849	2.479	0.0723	1367	124	4	496	14	868	25	1215	35
	1.250	1.2272	2.049	0.0598	1654	102	3	410	12	717	21	1004	29
	1.125	0.9940	1.660	0.0484	2042	83	2	332	10	581	17	813	24

Features/Benefits

Power End Features:

- Cast iron power frame
- Heavy-duty roller crankshaft bearings

- Precision type, aluminum alloy crankpin bearings
- Cast iron connecting rods
- Alloy steel crosshead pins
- Ductile Iron crankshaft with ground journals & polished throws
- Bronze bearing crosshead pin bushings
- Cast iron crossheads with upper/lower oil grooves
- One Piece Plungers
- Flooded sump, splash distribution lubrication
- Rated rod load is 2030 lbs.

Fluid End Features:

- Threaded Valve Covers - (CDI & CDPLX)
- Bolted Valve covers -(NAB & PSTL)
- Threaded type glands and integral stuffing boxes
- Bronze stuffing box bushings and packing followers
- Plungers - Solid Ceramic, or Tungsten coated
- General service plunger packing
- Optional flanged connections available (Adder section)
- Spherical suction and discharge valves
- Valve Seat & Valve Body: Nitronic 50
- Spring: Inconel
- Cage: 316L Stainless Steel
- Severe duty valves with inserts available
- Threaded suction and discharge connections

Disclaimer I

This website is intended as a reference tool only. It has been constructed from published data that is based on manufacturer's sales and engineering documents that are either current, historical and obsolete. Much of the machinery data contained herein has been re-rated through the years with different engineering criteria which maybe in conflict with legacy data. Much of the content published here is calculated online with the use of dynamic data using formulas and extrapolations considered to be sound engineering formulas and are correct to the degree that the data used is accurate. We have done our best to be as precise as as possible in this posting but do not represent any of the calculations or performance data to be entirely accurate. The data published here is intended to be general information rather than actual and to serve as a reference rather than a technical absolute. The user of such data should confirm such information independently.

Copyright and Disclaimers

WheatleyGas.com is your resource for Gaso pumps, Gaso pump parts and a supplier of ORIGINAL GASO PARTS and equipment, new used and remanufactured Wheatley, GASO and Wheatley/GASO plunger and piston pumps and pump parts and is not affiliated with Wheatley/GASO Inc. or its parent company, National Oilwell Varco, Copyright ©2024 IEQ Industries, a Gallagher Fluid Handling Company. All rights reserved, *Used under license from IntelleQ Holdings, LLC.